

30 JUN 2004

**(19) World Intellectual Property Organization
International Bureau**



(43) International Publication Date
24 July 2003 (24.07.2003)

(10) International Publication Number
WO 03/061122 A2

PCT

(51) International Patent Classification⁷: **H03K**

[DZ/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **HOURLANY, Jean** [FR/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number: PCT/TB02/05619

(22) International Filing Date:
18 December 2002 (18.12.2002)

(74) Agent: LOTTIN, Claudine; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
01403383.1 28 December 2001 (28.12.2001) EP

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

(72) Inventors; and

(75) **Inventors/Applicants (for US only):** GASMI, Ahmed

[Continued on next page]

(54) Title: REGENERATING AMPLIFIER CIRCUIT

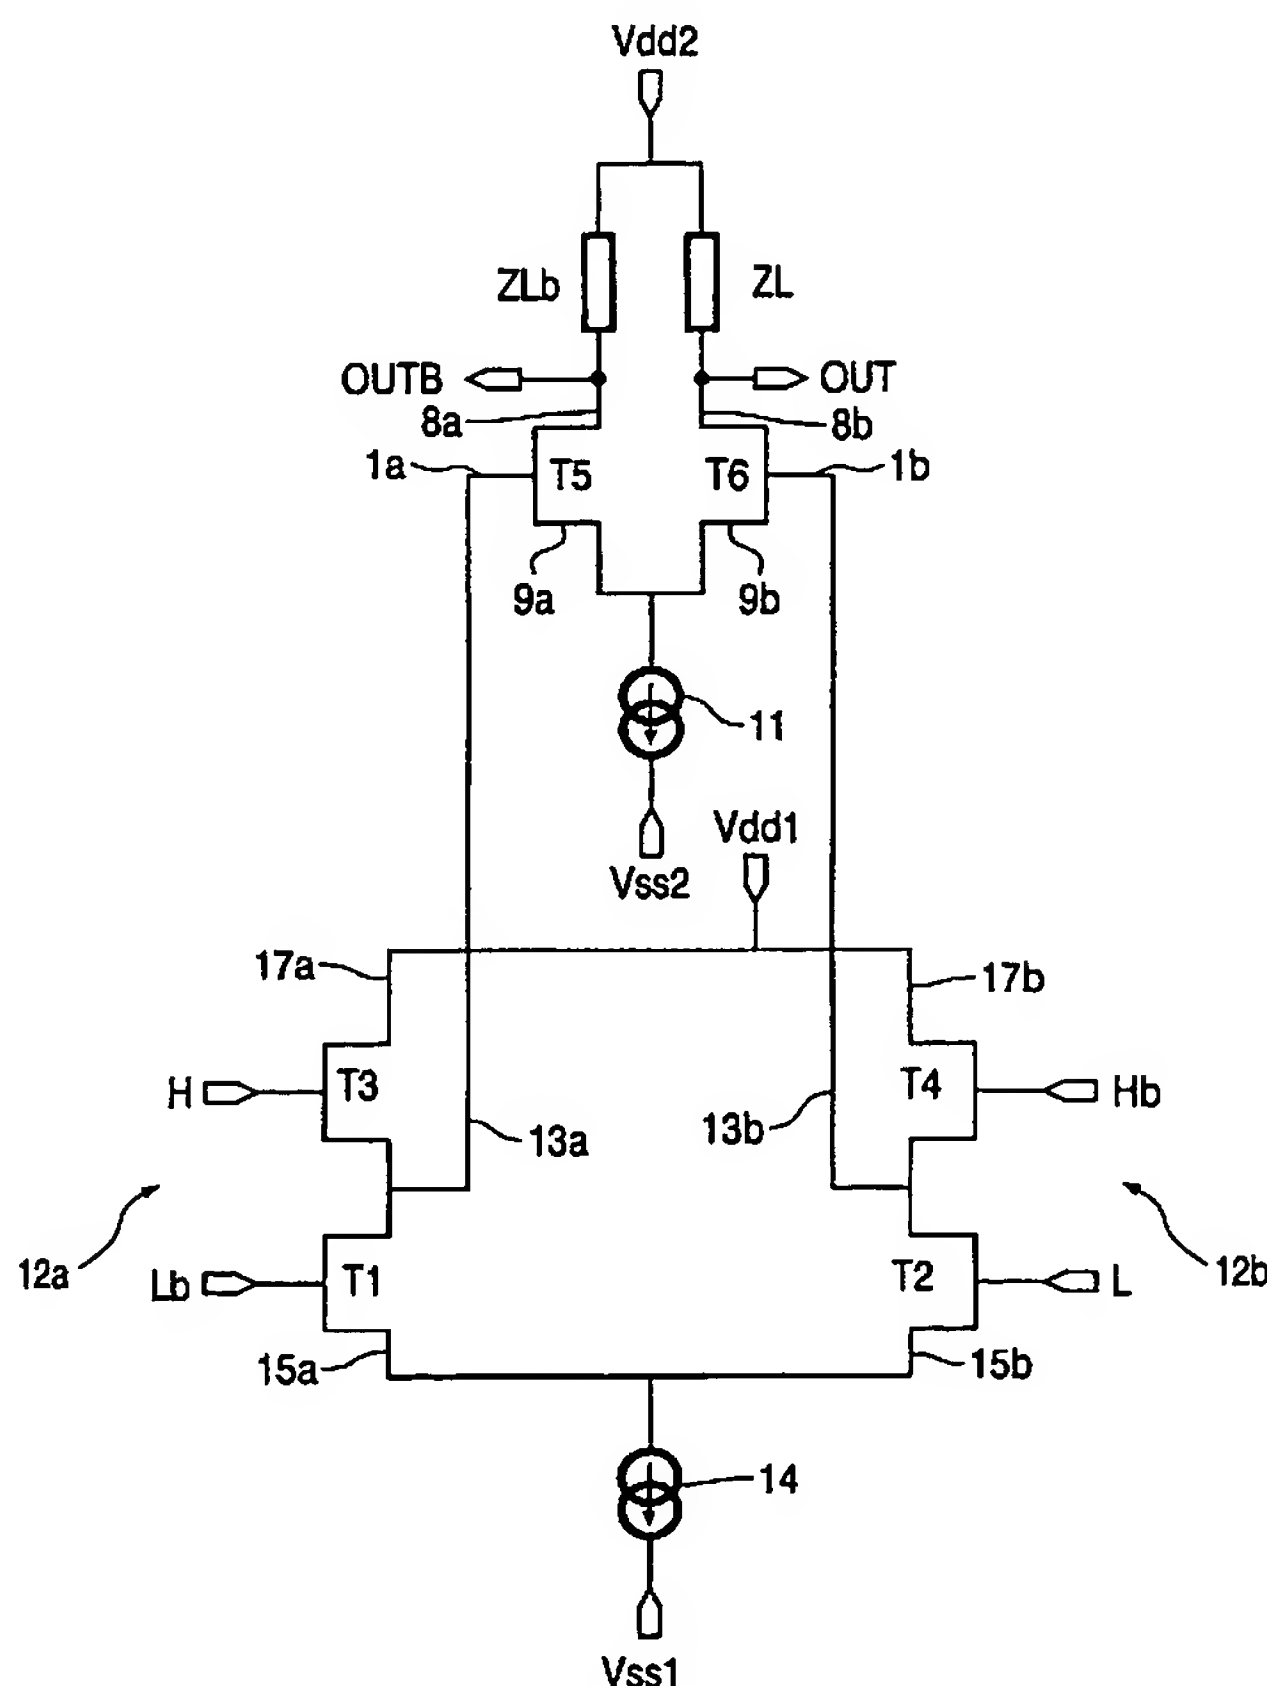

(57) Abstract: An amplifier circuit for regenerating complementary digital signals which comprises a differential pair of transistors (T5, T6). This circuit also comprises a pair of push-pull amplifiers (12a, 12b) which consists of a first and a second push-pull amplifier having a first and a second low input (L, Lb) which are coupled to a source for the input signal and its complement, respectively, a first and a second high input (H, Hb) which are coupled to a source of the complementary input signal and to a source of the input signal, respectively, a first and a second output (13a, 13b) which supply, under a low impedance and during switching, brief and intense current pulses of said complementary input signals of increased amplitude in order to apply these pulses to the first and second control inputs (1a, 1b) of the first and second transistors (T5, T6) of the differential pair, respectively.

WO 03/061122 A2



ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished upon receipt of that report*